


DLR AW8: Load swivel grade 80

- Part of our DLR lifting point family
- DLR = Dolezych Load Rings
- Dolezych marking & quality
- Red powder-coated
- Metric thread according to DIN 13-1
- Always in stock

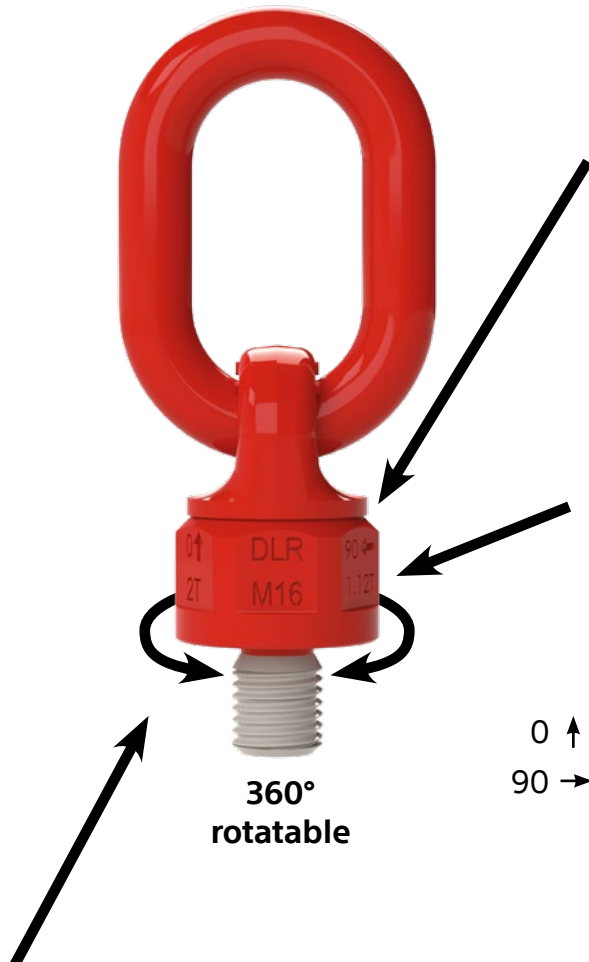

Hexagon for easy installation

- In contrast to other grade 80 lifting swivels our DLR AW8 has a hexagonal base
- With standard open-ended wrenches, the right torque can be applied from any direction

Read load capacity easily & safely

- Load capacity specification for both 0° and 90° stamped on the base
- This allows you to read both load capacities easily and reliably without having to refer to the operating instructions
- An additional arrow makes it even easier to read, as the arrow with the correct load capacity information points in the direction of the load path during lift

0 ↑ = Load capacity with 1 strand and 0° sling angle
90 → = Load capacity with 1 strand and 90° sling angle


Rotatable (ball bearing mounted)

- Ball bearing for easy load alignment
- Can be rotated through 360° so that the (vertically by 240°) pivoting bracket self-aligns under load

Marking for the inclination angle

- Easy recognition of the inclination angle 0° and 45° thanks to embossed marking lines



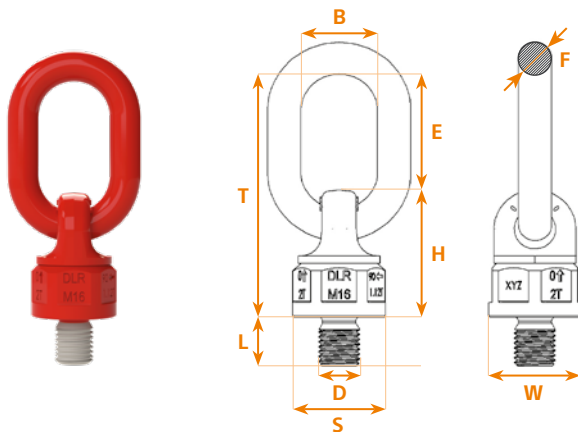

Item no.	Size D x L (mm)	Load capacity 1-leg (t)		Torque (Nm)	Dimensions (mm)						Wrench width S (mm)	Weight (approx. kg)
		0°	90°		T	B	E	F	H	W		
62 – 0960 0081	M 8 x 13	0,60	0,30	10	96	30	44	13	52	36	33,4	0,44
62 – 0960 0082	M 8 x 18	0,60	0,30	10								0,44
62 – 0960 0102	M 10 x 18	0,90	0,45	16								0,44
62 – 0960 0121	M 12 x 18	1,00	0,50	28								0,46
62 – 0960 0161	M 16 x 20	2,00	1,12	70								0,46
62 – 0960 0162	M 16 x 30	2,00	1,12	70								0,48
62 – 0960 0201	M 20 x 30	4,00	2,00	135	153,5	40	72,5	18	81	60	54,2	1,57
62 – 0960 0241	M 24 x 30	6,30	3,15	230								1,59
62 – 0960 0301	M 30 x 35	10,60	5,30	465	205	50	95	25	110	80	74	3,90
62 – 0960 0302	M 30 x 35	11,80	8,00	465	192	50	95	22	97	93	85	4,00
62 – 0960 0361	M 36 x 50	11,80	8,00	814	205	50	95	25	110	80	74	4,20
62 – 0960 0421	M 42 x 50	15,00	10,00	1.304	235,5	65	113	28	122,5	93	85	6,40
62 – 0960 0481	M 48 x 68	20,00	15,00	1.981								6,60
62 – 0960 0561	M 56 x 78	20,00	15,00	3.000								10,20

Item no.	Working Load Limit WLL (t)				Working Load Limit WLL (t)			
	1-leg 0°	2-legs 0°	1-leg 90°	2-legs 90°	2-legs 0° – 45°	2-legs 45° – 60°	3-/4-legs 0° – 45°	3-/4-legs 45° – 60°
62 – 0960 0081	0,60	1,20	0,30	0,60	0,42	0,30	0,63	0,45
62 – 0960 0082	0,60	1,20	0,30	0,60	0,42	0,30	0,63	0,45
62 – 0960 0102	0,90	1,80	0,45	0,90	0,63	0,45	0,94	0,67
62 – 0960 0121	1,00	2,00	0,50	1,00	0,70	0,50	1,05	0,75
62 – 0960 0161	2,00	4,00	1,12	2,24	1,56	1,12	2,35	1,68
62 – 0960 0162	2,00	4,00	1,12	2,24	1,56	1,12	2,35	1,68
62 – 0960 0201	4,00	8,00	2,00	4,00	2,80	2,00	4,20	3,00
62 – 0960 0241	6,30	12,60	3,15	6,30	4,41	3,15	6,61	4,72
62 – 0960 0301	10,60	21,20	5,30	10,60	7,42	5,30	11,13	7,95
62 – 0960 0302	11,80	23,60	8,00	16,00	11,20	8,00	16,80	12,00
62 – 0960 0361	11,80	23,60	8,00	16,00	11,20	8,00	16,80	12,00
62 – 0960 0421	15,00	30,00	10,00	20,00	14,00	10,00	21,00	15,00
62 – 0960 0481	20,00	40,00	15,00	30,00	21,00	15,00	31,50	22,50
62 – 0960 0561	20,00	40,00	15,00	30,00	21,00	15,00	31,50	22,50

Do you have questions about the product?
We will be happy to advise you.
Dolezych GmbH & Co. KG | T +49 231 82 85-0
M info@dolezych.de | www.dolezych.de



Find out more in
our online shop