


DoQuick: The fastest ratchet load tensioner in the world!

Characteristics

- LC up to 10.000 daN
- Tensioning distance = 261 mm
- Length L1 = 412 – 673 mm
- Weight ≈ 3,5 kg
- Special coating on all components
- Exterior paint in black and orange

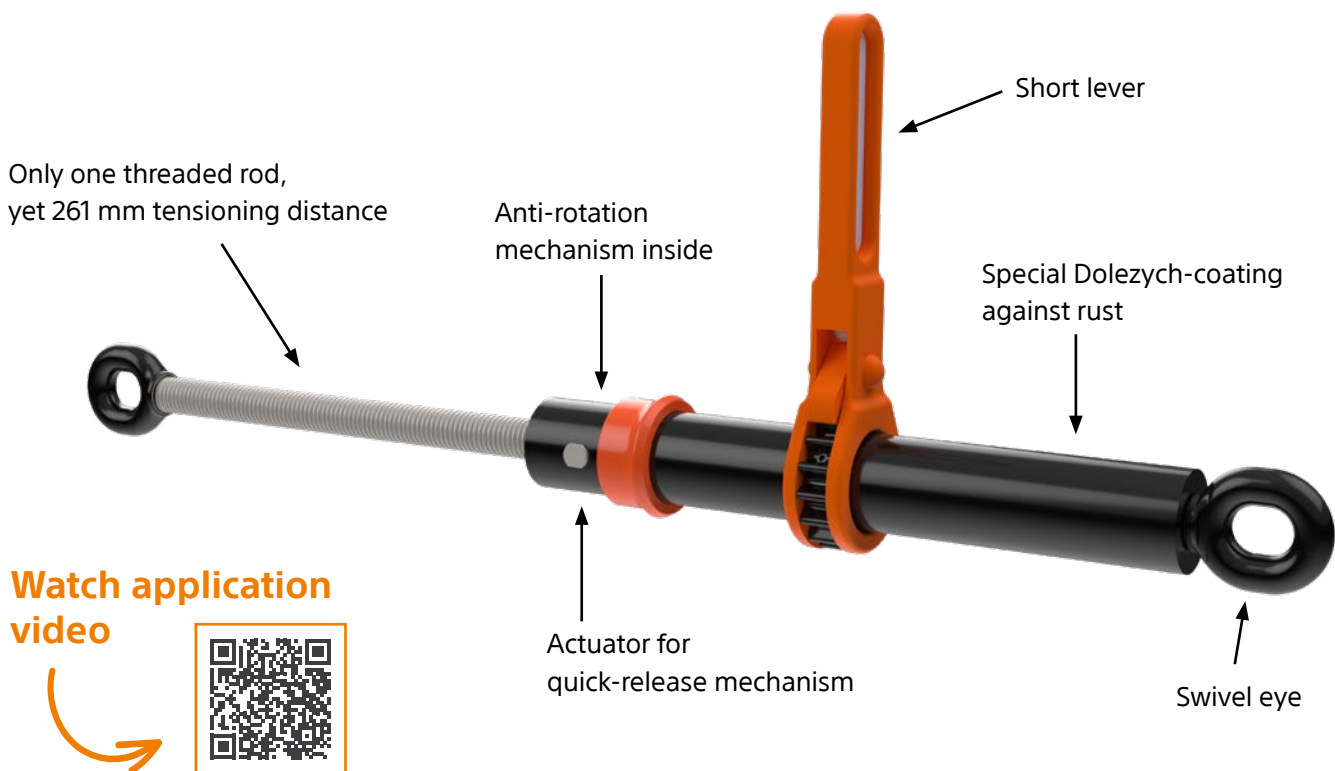

Saving time and energy

1. Thanks to our **patented quick release mechanism**, you will never have to unscrew the thread by hand again, but can pull it out completely in less than a second.
2. Pre-tightening also works very easily, as you can simply “push” the threaded rod into the tensioner and then tighten it effectively.

Doubled tensioning travel

Compared to a standard ratchet load tensioner, the DoQuick has **twice the tensioning-distance**: This makes hooking the chains much less strenuous, as you do not have to pre-tighten the chain as much at the beginning.

Maximum service life

Even in rain and damp conditions, the ratched load tensioner remains **rust-free for longer** thanks to the special Dolezych-coating, which also ensures that it remains **easy to operate over time**. And thanks to the specially developed anti-rotation device, threaded rods can **never be overtightened again**.

Space-saving

Due to the **very short lever**, the DoQuick can be used in a space-saving manner and can be easily stowed away when not in use.

Safely apply force

The swivel eye prevents unintentional twisting of the lashing chain – ensuring that **pretensioning forces can always be achieved**.

ARE YOU STILL **RATCHETING** OR
ARE YOU ALREADY **DRIVING**?

Textile chain DoNova® with DoQuick

2-parted system

- DoNova® PowerLash 25/8
- LC 10.000 daN
- With shortening hook at the DoQuick
- With clevis end hook
- With identification sleeve



Steel lashing chains with DoQuick


1-parted system

- With fixed adapted DoQuick 100
- Grade 80 or 100
- Shortening claw VKS (Grade 80) or TVKS (Grade 100) or clevis parallel hook
- Up to LC 10.000 daN



2-parted system

- With separate DoQuick 100
- Grade 80 or 100
- Parallel hooks with safety device firmly connected to the DoQuick via coupling links
- Up to LC 10.000 daN

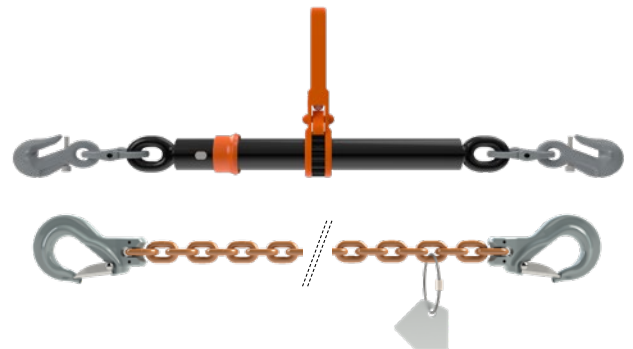

Comparison of our ratched load tensioner

Nominal size – Grade	Lashing Capacity (LC) daN	Tensioning distance (mm)			Length L1 min-max (mm)			Lever-length (mm)		
		Standard	DoRa	DoQuick	Standard	DoRa	DoQuick	Standard	DoRa	DoQuick
80 – 80	4.000	130			350 – 510			190		
80 – 100	5.000	165			335 – 500			252		
100 – 80	6.300	130	273	261	360 – 510	300 – 573	412 – 673	220	360	209
100 – 100	8.000	155			365 – 520			248		
130 – 80	10.000	130			366 – 515			350		

Do you have questions about the product?
We are happy to advise you.
Dolezych GmbH & Co. KG | T +49 231 82 85-0
M info@dolezych.de | www.dolezych.de



Visit our
online-shop